



RF Capacitance Level Switch



NIVOLARM

ALC 810

ALC 830

ALC 860

Features

- Offered with a wide range of probes
- Compact Design
- Universal Power supply
- Field selectable fail-safe operation
- Conforms to International Standards
- Remote monitoring



RF Capacitance Level Switch

The RF Capacitance level switch provides accurate and reliable detection of conducting as well as non-conducting liquids, solids or slurries, stored in open or closed containers. It can also detect the level of material flowing in closed pipes, open channels or moving on conveyor belts. The performance of the instrument is independent of properties like conductivity and corrosiveness and of process parameters such as temperature and pressure.

The instrument works on the field proven RF Technology. A RF signal is applied to the probe and the tank (reference). A change in the level results in a change in the admittance between the probe and the tank. This change is detected by the electronics and an alarm generated.

Offered with a wide range of probes

Ensures compatibility with a large number of applications.

Compact Design

Suitable for installation in restricted spaces.

Universal Power supply

Accepts any voltage from 85 Vac to 265 Vac.

Field selectable fail-safe operation

Offers reliable detection of high and low level.

Conforms to International Standards

Designed to meet global requirements and available with international approvals.

Remote monitoring

Easy monitoring of the process even in hard to reach places.

NIVOLARM

ALC 810

Compact

NIVOLARM

ALC 830

General Purpose

NIVOLARM

ALC 860

Intelligent



Technical Specifications

Mains Supply	: 85 Vac to 265 Vac, 50/60 Hz, Option : 18 Vdc to 30 Vdc
Outputs	: LED, Relay, Open Collector
Time Delay	: 2 to 30 seconds adjustable
Process Pressure	: 10 bar max Option : 24 bar max
Process Temperature	: 80°C max. Option : +450°C max.
Ambient Temperature	: -20°C to +60°C
Housing	: Cast Aluminum
Max. Insertion Length	: Rod Probe : 3,500 mm : Rope Probe : 20,000 mm
Protection	: IP67 Option : Ex-proof Protection EEx ib IIB T4



Product Range

A wide range of converters are available to suit the specific customer needs.

Compact Model

For OEM's and for installation in restricted spaces. The electronics is enclosed in a compact housing and integrated with the probe into a single mechanical unit.

General Purpose Model

Simple to use, having all the essential features. Suitable for most of the typical applications.

Intelligent Model

Microcontroller based instruments incorporating all the features of the general purpose instrument and offering additional confidence in the output signal with built-in diagnostics.

Operation in Hazardous Locations

The instruments are also available with Intrinsically safe electronics or Explosion proof housings for use in potentially explosive environments.

Sanitary Version

Available with sanitary connections and stainless steel construction for use in hygienic applications in the Food, Beverage and Pharmaceutical Industries.

A variety of rod and rope probes are available for optimal suitability with the following applications.

- Corrosive
- High Temperature and Pressure
- Vacuum
- Applications with build-up
- Sanitary Applications
- Materials with low dielectric constant



Nivo RF Capacitance Level Switches provides trouble free sensing of

Liquids

Water
Acids
Juices
Alkalis
Oils

Slurries

Coal Slurry
Sugar Syrup
Ore Slurry

Pastes

Fruit Pulp
Gum
Chocolate
Molasses


Dry Powders

Cement
Fly ash
Coffee powder
Milk powder
Chemicals

Solids

Food Grains
Fertilisers
Sugar Crystals
Coal
Limestone

And many more!

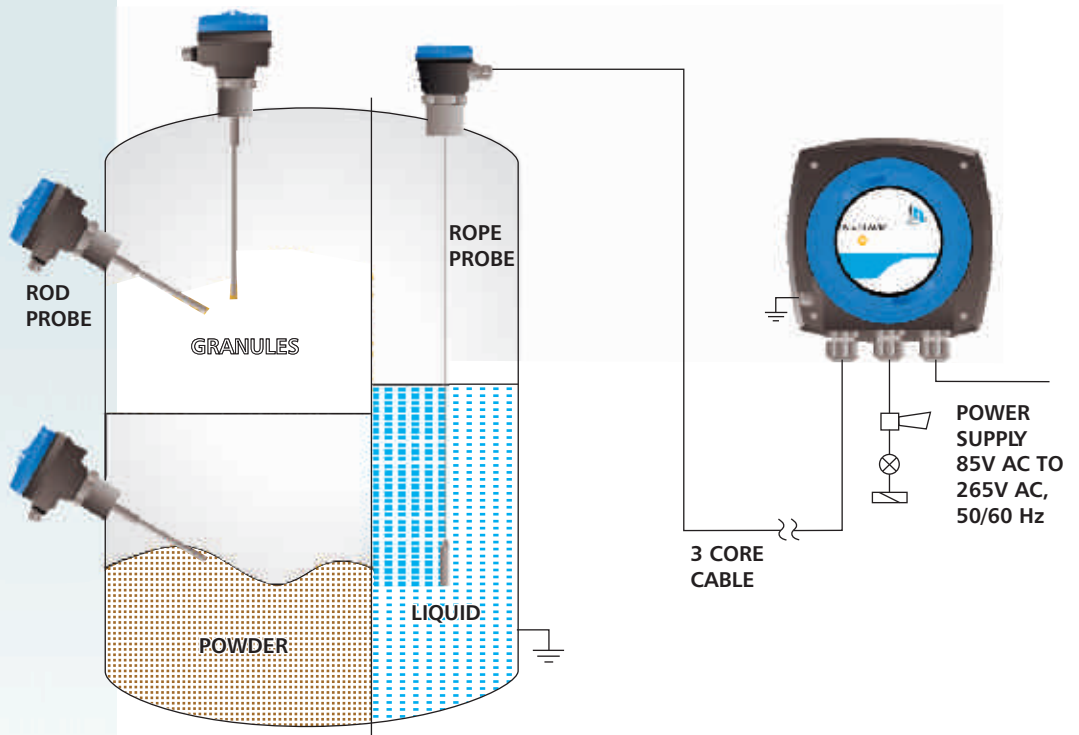

We reserve the right to modify the technical data without prior notice.



Manufactured by

Nivo Controls Private Limited

104-115, Electronic Complex, Indore 452 010. India.

Phone : +91 731 4081305

Fax : +91 731 2550075

E-mail : info@nivocontrols.com

URL : www.nivocontrols.com

Marketed & Supported By

Toshbro Controls Pvt. Ltd.

8, Mohatta Bhavan, Off Dr. E. Moses Road,
Worli, Mumbai - 400 018.

Phone : +91 22 2495 5239 / 4739

E-mail : info@toshbrocontrols.com

URL : www.toshbrocontrols.com

• Chennai • Indore • Kolkata • New Delhi • Surat • Vadodara

